

# LED Battens

## Uni Batten IP20 Tri-Colour with Sensor



### Features

- Traditional batten profile.
- Surface mountable or suspendable.
- No external junction box required.
- Broad 120° beam angle.
- Available with built-in sensor and tri-colour models.
- IK08 rating.
- Dual motion and lux sensor.

The Uni IP20 Batten Series is built around a philosophy of delivering ease of installation with high efficiency.

The Uni IP20 Batten Series maintains a traditional batten profile and offers versatile installation options, allowing for both surface and suspension mounting. With a broad 120° beam angle, it provides wide illumination, while its IK08 rating ensures durability in various environments. This tri-colour model features dual motion and lux sensors for enhanced control—all without the need for an external junction box.

### Specifications

Power factor	>0.9
CRI	>80
Beam angle	120°
IP rating	20
Lifetime (L70)	>72,000 & >60,000hrs
Warranty	5 years

### Sensor settings

Hold time	1m, 5m, 15mins or infinite
Daylight sensor	50Lux or disabled
Standby period	0s, 5m, 30m or infinite
Standby level	10, 20, 30 or 50%


Highlighted values = sensor default settings

Model	CCT	Dimensions (mm)	UGR	LCP	Sensor	Watt	Lumens	Efficacy
EP-UNI-TS620-18	4/5/6000K	L621xW71.3xH76	>22	18.15	Yes	18	2216.06	122lm/W
EP-UNI-TS1220-25	4/5/6000K	L1221xW71.3xH76	>22	25.85	Yes	25	3498.38	135lm/W




# LED Battens

Uni Batten IP20 Tri-Colour with Sensor

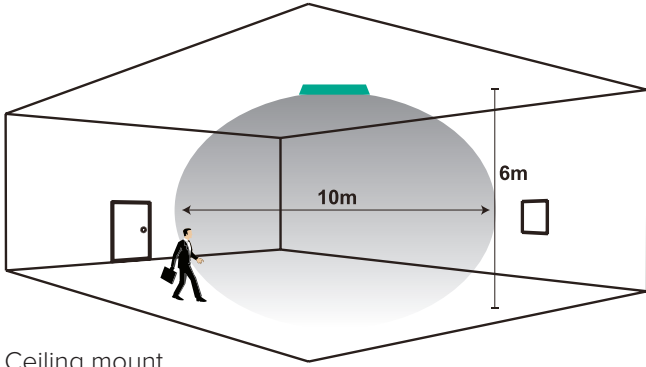

Ceiling mount

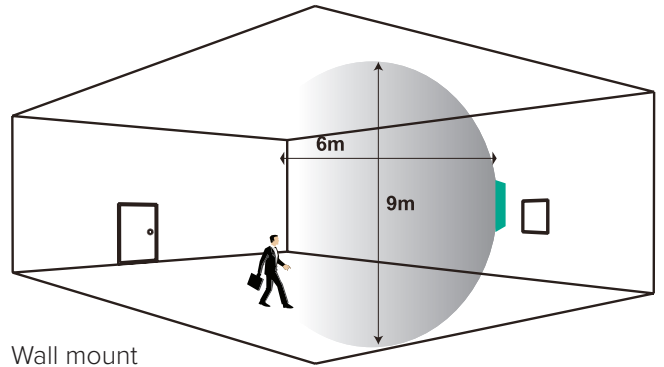

Wall mount

