

LED Battens

Uni Batten IP20 with Sensor



Features

- Traditional batten profile.
- Surface mountable or suspendable.
- No external junction box required.
- Broad 120° beam angle.
- Available with built-in sensor and tri-colour models.
- IK08 rating.
- Dual motion and lux sensor.

The Uni IP20 Batten Series is built around a philosophy of delivering ease of installation with high efficiency.

The batten's built-in dual motion and lux sensor is easily controlled by the Emerald Universal Remote Control (sold separately). The hand held remote switches the sensor on and off and adjusts hold time, stand by periods and standby dimming levels. The remote control also includes 4 preset program options to choose from. You have the choice to set your own preferences or select from one of the preset settings.



Remote Control sold separately

Specifications

Power factor	>0.9
CRI	>80
Beam angle	120°
IP rating	20
Lifetime (L70)	>72,000 & >60,000hrs
Warranty	5 years

Sensor settings

Hold time	1m, 5m, 15mins or infinite
Daylight sensor	50Lux or disabled
Standby period	0s, 5m, 30m or infinite
Standby level	10, 20, 30 or 50%


Highlighted values = sensor default settings

Model	CCT	Dimensions	UGR	LCP	Sensor	Watt	Lumens	Efficacy
EP-UNIG3-S1220-15	5000K	L1221xW71.3xH76	>22	14.97	Yes	15	2514.94	168lm/W
EP-UNIG2-S1220-25	5000K	L1221xW71.3xH76	>22	24.23	Yes	25	3609.2	149lm/W




LED Battens

Uni Batten IP20 with Sensor

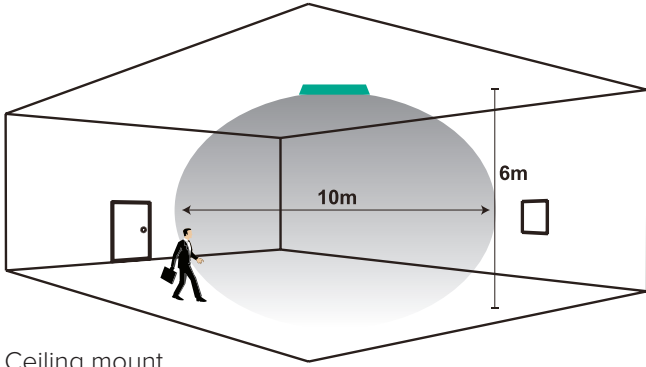

Ceiling mount

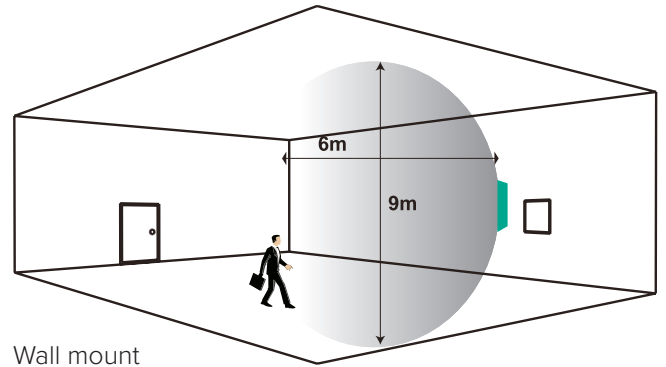

Wall mount

